

SENSING DEVICES LTD

# SD01534 Ex e RTD

## DATA SHEET

The SD01534 Resistance Temperature Detector (RTD) is a simplex or duplex PT100 sensing element (1008 at 0°C) housed in a metal probe. A number of different lengths and styles of probes are available for different temperature measurement applications (see page 2 for a number of examples). Connections are made via a flying lead housed in conduit, terminals on a ceramic block, terminals within a metal/plastic terminal housing or plug/socket.

<b>Working Temperature</b>	<b>-196°C to +650°C (Application and environment will determine which element, cable and insulation is used.)</b>
<b>Ingress Protection</b>	Minimum requirement IP20, Up to IP68 Depending on application and environment.
<b>Approval</b>	Ex and IECEx Approved.
<b>Cable Length</b>	Maximum 15 Metres.

The RTD shall be subject to an electric strength test using a test voltage of 500 Vac applied between the circuit(s) and the metal probe housing for 60s, there shall be no evidence of flashover or breakdown and the maximum current flowing shall not exceed 5 mA.


The equipment has the following safety description:

<b>Simplex Version (1 Element)</b>	
<b>Ui = 15.0V</b>	
<b>II = 2 mA</b>	
<b>Pi = 10mW</b>	
<b>Ci = 0</b>	
<b>Li = 0</b>	

<b>Duplex Version (2 Elements)</b>		
	Element 1	Element 2
<b>Ui</b>	15.0V	15.0V
<b>II</b>	2Ma	2mA
<b>Pi</b>	10mW	10mW
<b>Ci</b>	0	0
<b>Li</b>	0	0

The equipment shall be marked with the following:

 II 2 G D
Ex d IIC T6 IP68
Ex tD A21 T100°C IP68

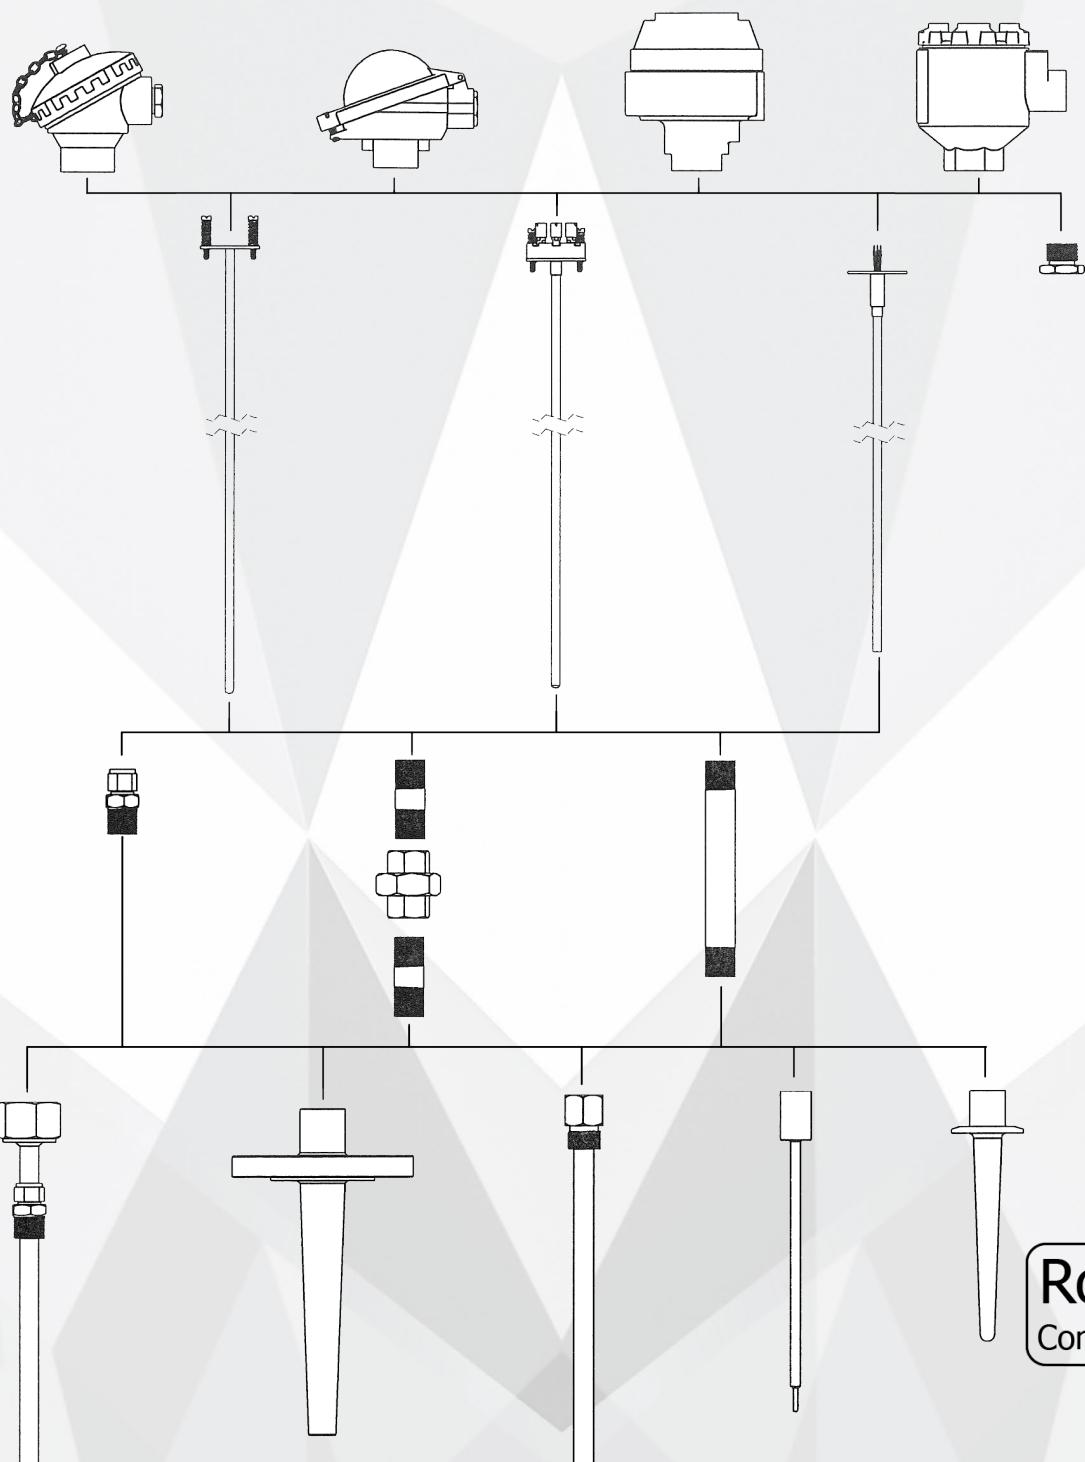

**RoHS**  
Compliant

